

Premix VPF™

Wall & Floor

Vinyl Pool Foundation

PMM Vinyl Pool Finish™ (VPF) is a premixed blend of vermiculite and Portland cement specially formulated for in-ground vinyl liner pool installations. The firm foundation will not wash out or leave behind footprints and heel marks that are typical with sand foundations but the non-abrasive formula will not add extra wear and tear on the pool liner.

▶ FEATURES

- Lightweight protective support
- Pre-blended, just add water
- Non-abrasive formula will not harm liner

▶ USES

PMM VPF™ offers a firm liner foundation without the abrasive surface of sand and cement blended mortars. The non-abrasive lightweight formula is perfect for floor, wall, stairs and around skimmers.

▶ COVERAGE

One bag of VPF™ when properly mixed will yield approximately 2.7 cubic feet. VPF bag covers approximately 10 square feet at a 2", coverage will vary depending on soil types.

▶ SURFACE PREPARATION

VPF™ should be applied over properly excavated pool area. VPF™ is applied at 1-1/2" to 2" To accommodate VPF™ add 2" to manufacturer's finished dimensions. The bottom and hopper should be fine graded and raked free of any loose dirt. Attempting to tamp or pack loose debris will provide a poor base and may increase erosion. VPF™ will not adhere to mud. For best results base and walls should be slightly moist to prevent moisture absorbing to quickly from the VPF.

▶ MIXING

VPF™ comes preblended in 40 lb. bags. First add about 2.5 gallons of potable water per bag into the mixer. After VPF™ has been added to the water, mix until consistency is uniform. Up to an additional 1.5 gallons of water can be added if necessary. Mixing time should be approximately 10 minutes. Continuous mixing, up to 2 hours, may need additional water.

▶ APPLICATION

After VPF™ has been properly mixed it should be applied with a smooth trowel 1-1/2" to 2" thick onto the pool wall and floor panels. It is recommended that VPF™ has had a sufficient amount of time to harden before traffic. Depending on temperature, hardening takes roughly 48 hours.

▶ STORAGE

VPF™ must be kept dry and stored in a dry place. Keep covered at the job site.

▶ WARNINGS

**EYE, SKIN AND RESPIRATORY IRRITANT.
KEEP OUT OF REACH OF CHILDREN.**

First Aid: Eyes – Flush with water for 15 minutes, lifting eyelids occasionally. Obtain medical attention if irritation persists.

Skin – Wash skin thoroughly with mild soap and cool water. If skin irritation, reddening or a rash occurs, seek medical attention.

Inhalation – If respiratory irritation occurs, move to fresh air. Obtain medical attention if irritation persists.

Ingestion – Seek medical attention immediately; untrained first aid personnel should not attempt to administer aid.

This product contains one or more chemicals known to the State of California to cause cancer.

WARNING: Do not breathe dust! This product contains Free Crystalline Silica which may cause cancer or delayed lung injury (Silicosis). Avoid creation of dust from this product whenever possible. Wear NIOSH approved respirator if creation of dust is unavoidable, or when working in dusty areas. See Safety Data Sheet for detailed information.

Hazardous Ingredients – Portland Cement (CAS# 65997-15-1) and trace amounts of Silica Quartz (CAS# 014808-60-7).


▶ PRODUCT AVAILABILITY

Item	Product	Size
050706	Premix VPF™	40 lb. bag

▶ TECHNICAL SERVICES

Refer to material safety data sheet, www.PMMproducts.com and industry standards prior to installation for additional information.

For technical assistance please contact our Technical Department at (800) 432-5539.

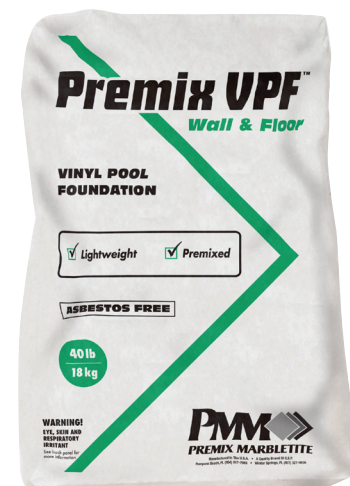

Premix VPF™

Wall & Floor

▶ WARRANTY

The effectiveness of this product depends upon its proper application and the condition and preparation of the surface to which it is applied.

Limited Warranty: The product shall be in its unopened package and of the kind specified within. THERE IS NO OTHER WARRANTY OR REPRESENTATION OF ANY KIND, EXPRESS OR IMPLIED (INCLUDING NO WARRANTY OF MERCHANTABILITY OR OF FITNESS FOR A PARTICULAR PURPOSE). No warranty shall be implied by law. This limited warranty continues only until such time as the buyer opens the package and examines its contents. If the buyer, after opening the package and examining its contents, determines that the product is not of the kind specified herein, the buyer should write to PREMIX-MARBLETITE MANUFACTURING COMPANY, 1259 NW 21st Street, Pompano Beach, Florida 33069, explaining the defect and enclosing a sample of the product. PREMIX-MARBLETITE, upon receipt of the sample from the buyer, will replace the portion of the product that is determined to be defective. This shall be the buyer's sole remedy for breach of warranty and such remedy shall be in lieu of any claim for damages, including consequential damages. Some states do not allow limitations on how long an implied warranty lasts, or exclusions or limitations of incidental or consequential damages, so the above limitations or exclusions may not apply to you. This warranty gives you specific legal rights, and you may also have other rights, which vary from state to state. The information contained in this bulletin conforms to the standard detail recommendations and specifications for the installation of the products manufactured by PREMIX-MARBLETITE and is presented in good faith. PREMIX-MARBLETITE assumes no liability, expressed or implied, as to the architecture, engineering or workmanship of any project.